




**EFEH** & ASSOCIATES

3319 INDUSTRIAL DRIVE • PEARLAND, TEXAS 77581 • TELEPHONE (281) 996-5031 • FACSIMILE (281) 996-5550

January 25, 2001



Ms. Donna Alexander  
 Verde Environmental, Inc.  
 7309 Schneider  
 Houston, Texas 77584

Dear Ms. Alexander:

Following are the results of the grab liquid samples submitted to our laboratory for analyses on December 15, 2000:


|                                       |                    |               |
|---------------------------------------|--------------------|---------------|
| SAMPLE I.D.                           | 3% Micro-Blaze Out |               |
|                                       | 12/06/00           |               |
| LAB NO.                               | M-2241-1           |               |
|                                       | Before             | After         |
| Eucolyptol, mg/L                      | 8.9                |               |
| 3-Cyclohexene-1-methanol, mg/L        | 2.2                |               |
| 1,6-Octadien-3-OL, 3,7-dimethyl, mg/L | 3.2                |               |
| Cyclodecane, mg/L                     | 5.6                |               |
| Butyl carbitol, mg/L                  | none detected      | none detected |

|      |               |
|------|---------------|
| Days | % Utilization |
| 0    | <0.1          |
| 1    | 8.95          |
| 2    | 16.82         |
| 4    | 33.45         |
| 6    | 43.81         |
| 8    | 65.87         |
| 10   | 76.45         |
| 12   | 89.63         |
| 14   | 97.81         |
| 16   | 98.28         |
| 18   | 99.94         |
| 20   | 100.0         |
| 22   | 98.54         |
| 24   | 99.79         |
| 26   | 99.88         |
| 28   | 99.94         |

This report may not be reproduced, except in its entirety, without the express consent of EFEH & Associates. Any results or opinions expressed herein apply only to the sample tested.

0001

## Micro-Blaze Out® 28-Day Biodegradation Chart

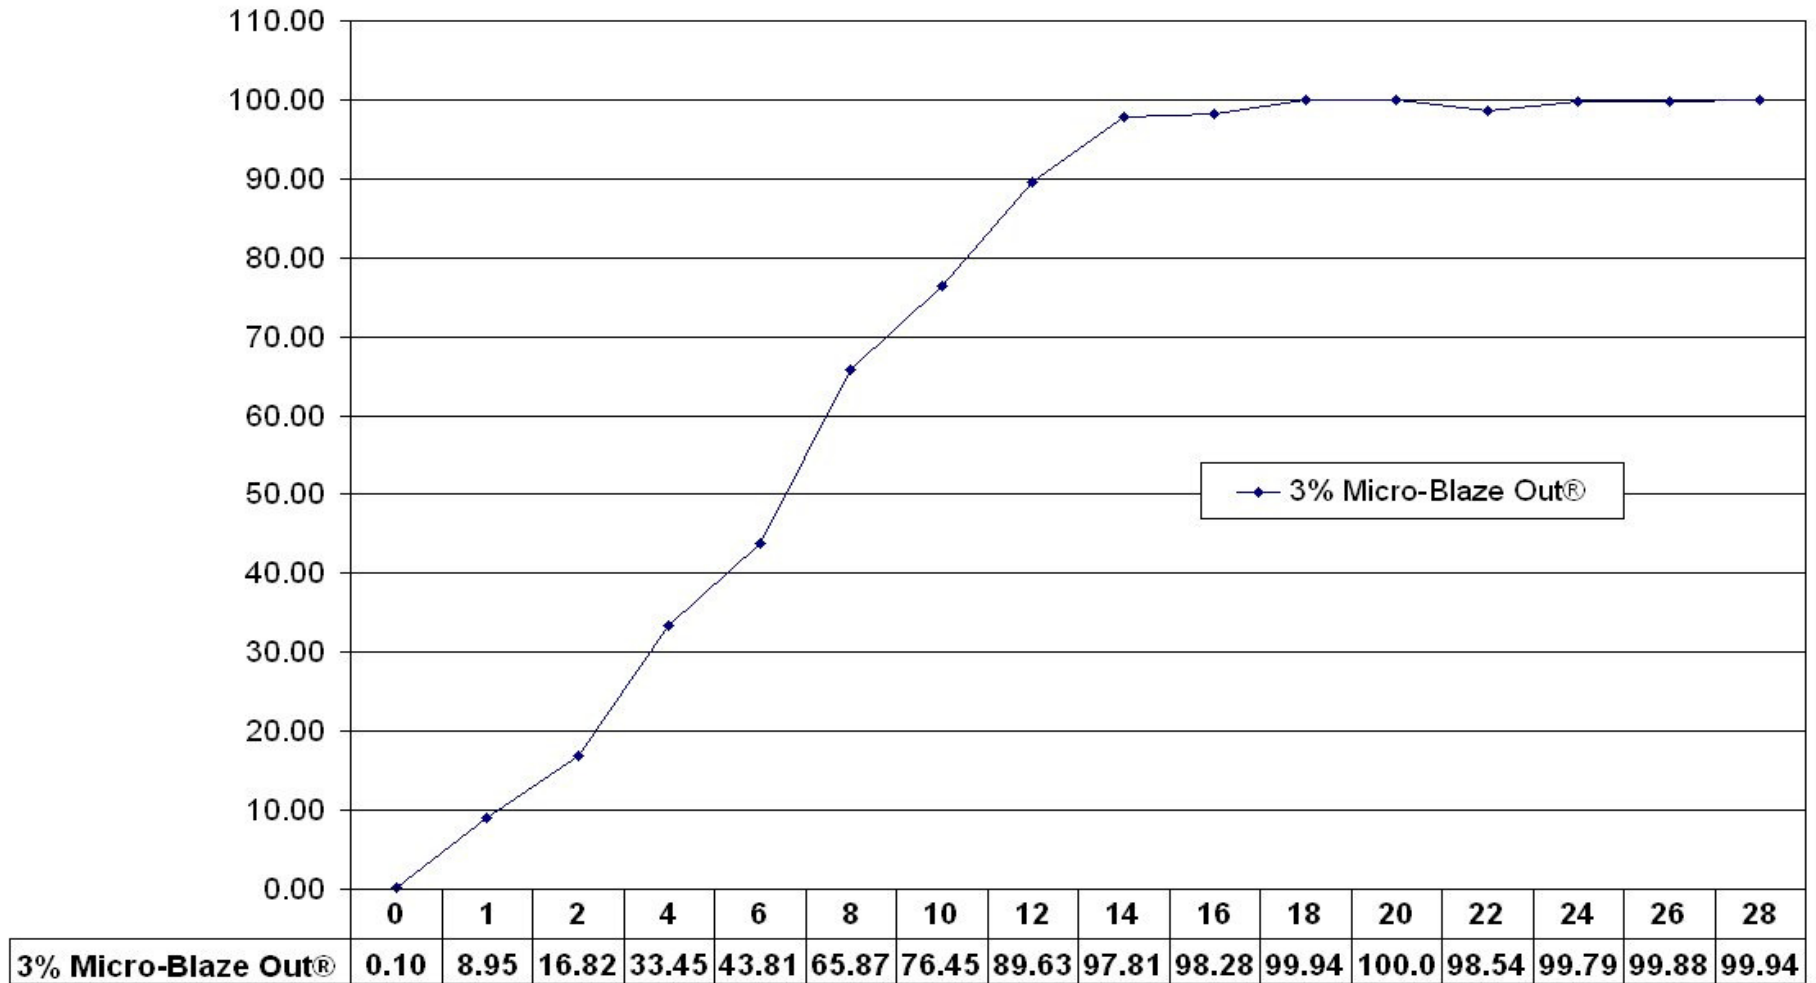

Test conducted using grab sample of a 3% solution of Micro-Blaze Out® mixed with a diesel/gasoline mixture approximating 30,000 ppm of contamination.

*Tested January 2001 by  
EFEH Labs, A U.S. EPA Laboratory, Pearland, Tx*